

## Cloth Inserted Rubber

SBR CI

### General Purpose


Where a fabric reinforced rubber is required

### Generally Resistant To

Most moderate chemicals wet or dry organic Acids, Alcohols, Ketones, Aldehydes

### Generally Attacked By

Ozone, Strong Acids, Fats, Oils, Greases and Most Hydrocarbons

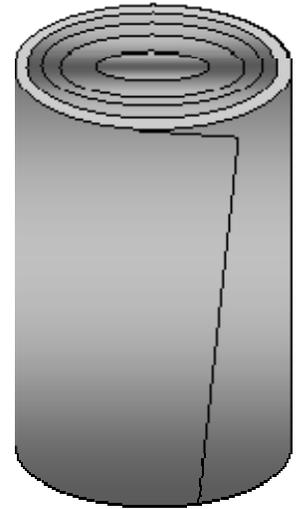

Color	Finish	Duro	Tensile	Elongation	Temperature
Black	Smooth	75/85	500 PSI	NA	250°F   125°C

### *Service is Our Business*

All technical advise and recommendation are rendered by Seller free of charge. While based on data believed to be reliable, seller assumes no responsibility.